

## Sheba

### Tekniske data

|                            |   |            |
|----------------------------|---|------------|
| Konstruktion               | Tuftet 1/10" opskåret, 2 trådet kemisk fixeret. Stykfarvet                                    |            |
| Luvmateriale               | 100% ren ny uld   |            |
| Mellemvæv                  | 100% PP   |            |
| Bagside                    | Tekstil   |            |
| Bredde                     | 400 eller 500 cm  |            |
| Luvhøjde                   | 7,5 mm  |            |
| Totalhøjde                 | 9,5 mm  |            |
| Løkkeantal                 | 210000 / m <sup>2</sup>   |            |
| Luvvægt                    | 1200 g/m <sup>2</sup>   |            |
| Totalvægt                  | 2100 g/m <sup>2</sup>   |            |
| Varmetransmissionsmodstand | 0,11 m <sup>2</sup> KW  | DIN 52 612 |
| Brugsklasse                | Bolig: Kraftig brug. Egnet til trapper når der anvendes et underlag.<br>Erhverv: moderat brug |            |

Creatuft forholder sig retten til at ændre de tekniske specifikationer ved forbedring af dette produkt.

Ved anvendelse af lim: brug EC1 lim

## Sheba

### Technical details

|                               |   |            |
|-------------------------------|---|------------|
| Manufacturing process         | Tufted 1/10" Cut pile, 2-plyed chemset yarn. Piece dyed.  |            |
| Pile composition              | 100% pure new wool  |            |
| Primary backing               | 100% PP   |            |
| Backing                       | Actionback  |            |
| Width                         | 400 or 500 cm   |            |
| Pile height                   | 7,5 mm  |            |
| Total height                  | 9,5 mm  |            |
| Tuft density                  | 210 000/ m <sup>2</sup>   |            |
| Pile weight                   | 1200 g/m <sup>2</sup>   |            |
| Total weight                  | 2100 g/m <sup>2</sup>   |            |
| Resistance of heat conduction | 0,11 m <sup>2</sup> KW  | DIN 52 612 |
| Suitability                   | Domestic: heavy duty, suitable for stairs only when an underlay is used<br>Contract: light duty |            |

Creatuft reserve the right to modify the characteristics of this product for quality improvement.

In case of adhesion: only use of EC1 glues.



Pure new wool pile



## Prøvemateriale

Prøvemateriale i form af tæppeprøver i størrelse 10 x 10 cm fremsendes fra dag til dag ved henvendelse til Fraster:

Mail: [post@fraster.dk](mailto:post@fraster.dk)  
Tlf: 87 88 22 44  
Post: Linåvej 9A  
8600 Silkeborg

## Samplmaterial

Carpetsamples size 10 x 10 cm can be delivered from one day to the next by contacting Fraster

Mail: [post@fraster.dk](mailto:post@fraster.dk)  
Tel: +45 87 88 22 44  
Post: Linåvej 9A  
DK-8600 Silkeborg

# Sheba





1666



1777



1581



1196



1346



1379




1444




1555



1335

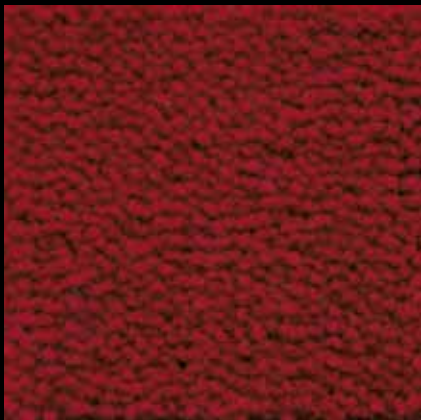

1768

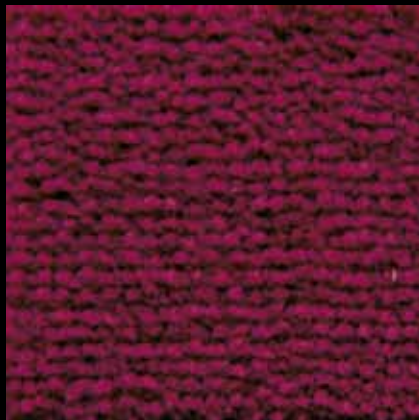

1799



1586






1764



1184



1089

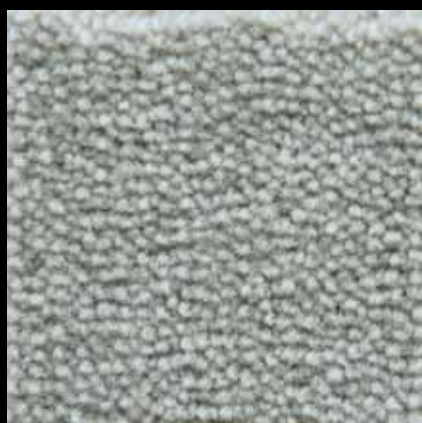

1106



1999




1599



1761



1888

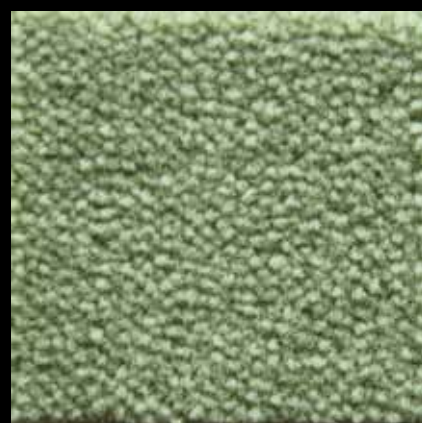

1072



1597



1108



1765