

Ceres

Tekniske data

Konstruktion	Tuftet 1/8" opskåret, 2 trådet tvundet, vasket garn, fikseret.	
Luvmateriale	100% ren ny uld	
Mellemvæv	100% PP	
Bagside	Tekstil	
Bredde	400 cm	
Luvhøjde	9 mm	
Totalhøjde	10,5 mm	
Løkkeantal	160 000 / m ²	
Luvvægt	1400 g/m ²	
Totalvægt	2300 g/m ²	
Varmetransmissionsmodstand	0,11 m ² K/W	DIN 52512
Brugsklasse	Bolig: Ekstra kraftig brug. Egnede til trapper når der anvendes et underlag. Erhverv: kraftig brug	

Creatuft forbeholder sig retten til at ændre de tekniske specifikationer ved forbedring af dette produkt.

Ved anvendelse af lim: brug EC1 lim

Ceres

Technical details

Manufacturing process	Tufted 1/8" Cut pile, twisted, 2-ply washed yarn, heat set	
Pile fiber composition	100% pure new wool	
Primary backing	100% PP	
Backing	Actionback	
Width	400 cm	
Pile height	9 mm	
Total height	10,5 mm	
Tuft density	160 000/ m ²	
Pile weight	1400 g/m ²	
Total weight	2300 g/m ²	
Resistance of heat conduction	0,11 m ² K/W	DIN 52512
Suitability	Domestic: extra heavy duty, suitable for stairs only when an underlay is used Contract: heavy duty	

Creatuft reserve the right to modify the characteristics of this product for quality improvement.

In case of adhesion: only use of EC1 glues.

Ceres



Pure new wool pile



Prøvemateriale

Prøvemateriale i form af tæppeprøver i størrelse 10 x 10 cm fremsendes fra dag til dag ved henvendelse til Fraster:

Mail: post@fraster.dk
Tlf: 87 88 22 44
Post: Linåvej 9A
8600 Silkeborg


Samplematerial

Carpetsamples size 10 x 10 cm can be delivered from one day to the next by contacting Fraster

Mail: post@fraster.dk
Tel: +45 87 88 22 44
Post: Linåvej 9A
DK-8600 Silkeborg

10-2007

FRASTER





3666



3777



3581




3764




3184



3089

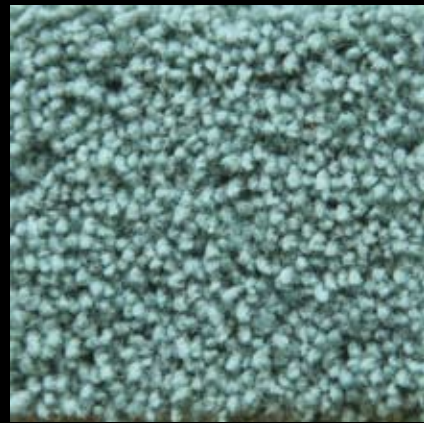

3196

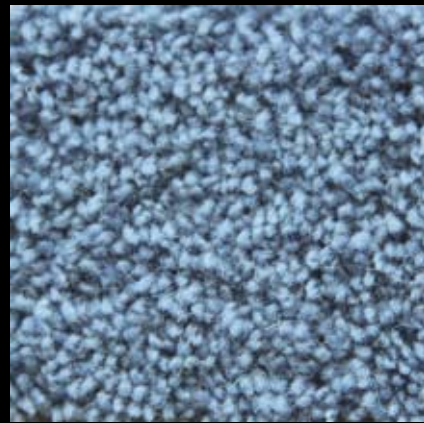


3346




3379



3106

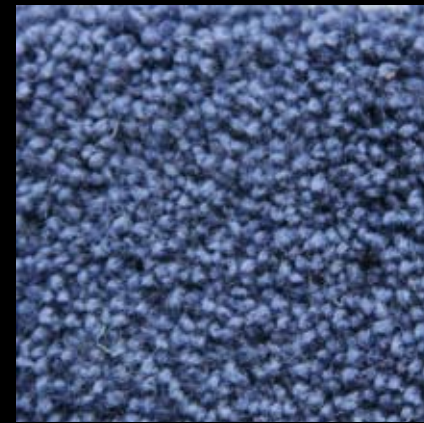

3999

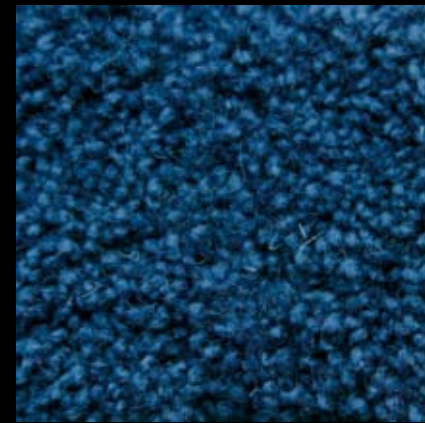

3599



3444



3555



3335




3761



3888



3072

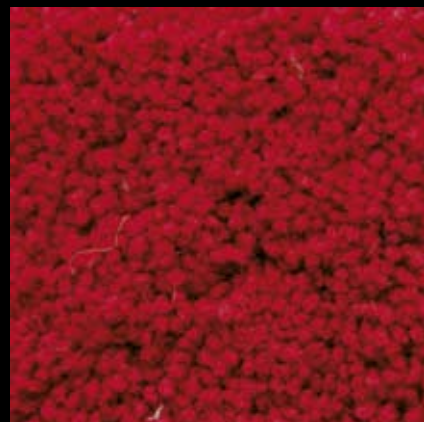

3768



3799



3586



3597



3108



3765